

C1628R $\varnothing 16\text{mm} \times 27.6\text{mm}$, 碳刷 Graphite Brushes

应用领域：小型电子产品、便携工具、智能门锁等领域。

Applications: small electronic products, portable electric tools, smart door lock, etc.


31-0108

电机参数 / Motor Data

1	电压	Voltage	V	12.0					
2	空载转速	No-load speed	rpm	10800					
3	空载电流	No-load current	mA	63					
4	堵转转矩	Stall torque	mNm	5.9					
5	堵转电流	Stall current	mA	700					
6	负载转矩	Load torque	mNm	1.96					
7	负载转速	Load speed	rpm	7200					
8	负载电流	Load current	mA	275					
9	最大输出功率	Max output power	W	1.67					
10	最大效率	Max efficiency	%	47.1					
11	转矩常数	Torque constant	mNm/A	9.26					
12	转速 / 转矩斜率	Speed/torque gradient	rpm/mNm	1831					
13	重量	Weight	g	20.8					
14	压敏电阻	Varistor	Yes/No	Yes					
15	工作温度范围	Operating temperature range	°C	-20~+60					

特性曲线 / Characteristics Curve

C1628R31-0108

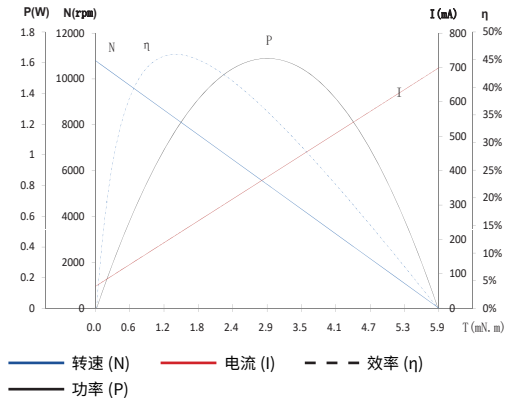

仅供参考，详细了解请以产品规格书为准。
For reference only, please refer to the product specification.

可选配置 / Options

齿轮箱：正齿轮

Gearbox: spur gearbox

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation range

法兰 Flange: 标准前后法兰 standard front and rear flanges / 定制法兰 custom flanges

轴 Shaft: 长度 length / 异形 shape

电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

齿轮组主要技术指标详见第 159 页

the main technical parameters are detailed on page 159

外观图 / Outline Drawing

