

6443ZWF $\varnothing$ 64mm*43mm, 无刷风机 Brushless DC Blower


应用领域：医疗器械等精密驱动领域。

Applications: precision drives in medical equipment fields.

				-2-24.0	-3-24.0	-4-24.0
电机参数 / Motor Data						
1	电压	Voltage	V	24.0	24.0	24.0
2	端电阻	Terminal resistance	Ω	0.83	0.24	1.33
3	相数	NO. of phase		3	3	3
4	输入功率	Input power	W	81	112	48
5	额定负载	Rated Load		风叶 /Blades (出气孔 / Blow hole: 4mm)	风叶 /Blades (出气孔 / Blow hole: 4mm)	风叶 /Blades (出气孔 / Blow hole: 4mm)
6	负载转速	Load speed	rpm	37400	43700	33000
7	负载电流	Load current	A	3.4	4.7	2
8	风压	Air pressure	Pa	8160	10190	6200
9	流量	Air flow	L/min	430	425	360
10	噪音	Noise	dB	≤ 45	≤ 45	≤ 45
11	重量	Weight	g	190	190	190
12	工作温度范围	Operating temperature range	$^{\circ}\text{C}$	10~70	10~70	10~70

仅供参考，详细了解请以产品规格书为准。
For reference only, please refer to the product specification.

特性曲线 /Characteristics Curve

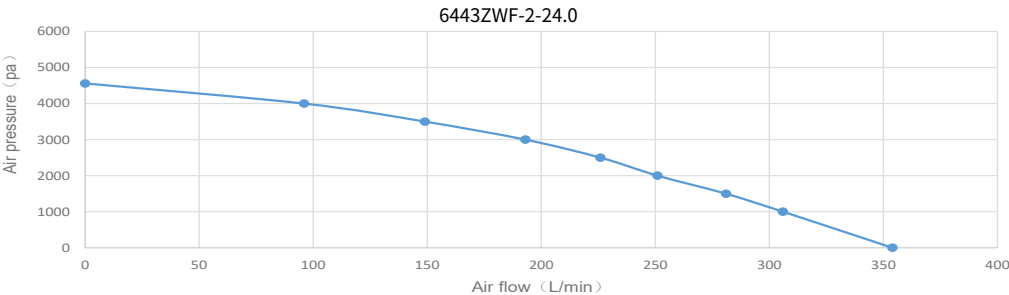

可选配置 /Options

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation range
驱动器 Driver: 可定制 customizable upon request
电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

端子定义 /Connection

霍尔传感器 /hall sensor AWG 24					
Pin1	Hu	blue	Pin9	V	red
Pin2	Hv	black	Pin10	NTC	white
Pin3	H+	yellow			
Pin4	W	red			
Pin5	NTC	white			
Pin6	Hw	black			
Pin7	H-	green			
Pin8	U	blue			

外观图 /Outline Drawing

