

C1020...10PP...(1)

Ø 10mm, 行星齿轮系列 Planetary Gearbox Series

应用领域：医疗器械、安防设备、视像产品、高端智能电玩、个人保健产品等领域。

Applications: medical equipment, security systems and locks, audio and visual products, personal healthcare products, and high-end hobby products.


C1020-110-2.5
-10PP171-0051

电机参数 / Motor Data

1	电压	Voltage	V	2.5
2	端电阻	Terminal resistance	Ω	3.7
3	空载转速	No-load speed	rpm	110
4	空载电流	No-load current	mA	100
5	最大转矩	Max torque	mNm	37.2
6	负载转矩	Load torque	mNm	9.8
7	负载转速	Load speed	rpm	80
8	负载电流	Load current	mA	230
9	减速比	Reduction ratio		1/171
10	重量	Weight	g	3.8
11	工作温度范围	Operating temperature range	°C	-10~+70

特性曲线 / Characteristics Curve

C1020-110-2.5-10PP171-0051

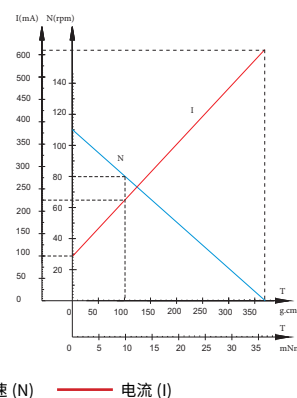

— 转速 (N) — 电流 (I)

仅供参考，详细了解请以产品规格书为准。
For reference only, please refer to the product specification.

可选配置 / Options

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation rang

法兰 Flange: 标准前后法兰 standard front and rear flanges / 定制法兰 custom flanges

电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

外观图 / Outline Drawing

